

Urban Oak Floors Specification

- 220mm Wide Board
- 4mm Oak Top Layer
- 11mm Multi Layered EUC Plywood Core
- 2200mm Length
- 8 Coat Treffert Coating System



Also available in 190mm, 260mm and 300mm Board Widths and 6mm Oak Top Layer with a 15mm Multi Layered EUC Plywood Core.


TREFFERT Sapphire™ Coating System







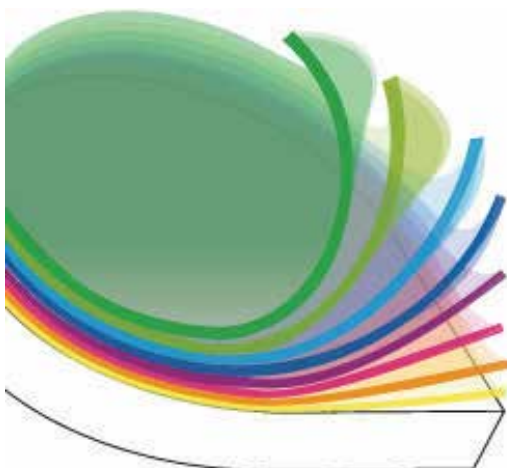

Features and Benefits

TREFFERT Sapphire™ is the best performing scratch-resistant coating system for flooring in the market today. This special coating system is ideally suited for surfaces in demanding environments or needing long-time guarantees.

Tested to reflect real life, it has both exceptional linear as well as rotational scratch resistance. It is highly resistant to scratches during transport, installation, and use meaning your Urban Oak floor stays looking like new longer.

Layer Construction



	Topcoat	7-10 g/m ²
	Topcoat	7-10g/m ²
	UV Hard Sealer T ransparent	20 g/m ²
	UV Hard Sealer T ransparent	20 g/m ²
	UV Duro Sealer	20 g/m ²
	UV Hard Filler T ransparent	20 g/m ²
	UV Hard Filler T ransparent	20 g/m ²
	UV PU Insulation	15 g/m ²